


LU05.S03 - v-bind with src - Teil 1

ZipFile with the HtML code-solution

Hints

- Download the file and copy the content into the code area of the W3School on the left hand side of the coding window.
- You can execute the code by pressing the *run* button
- The result will be presented in the right hand side of the window.

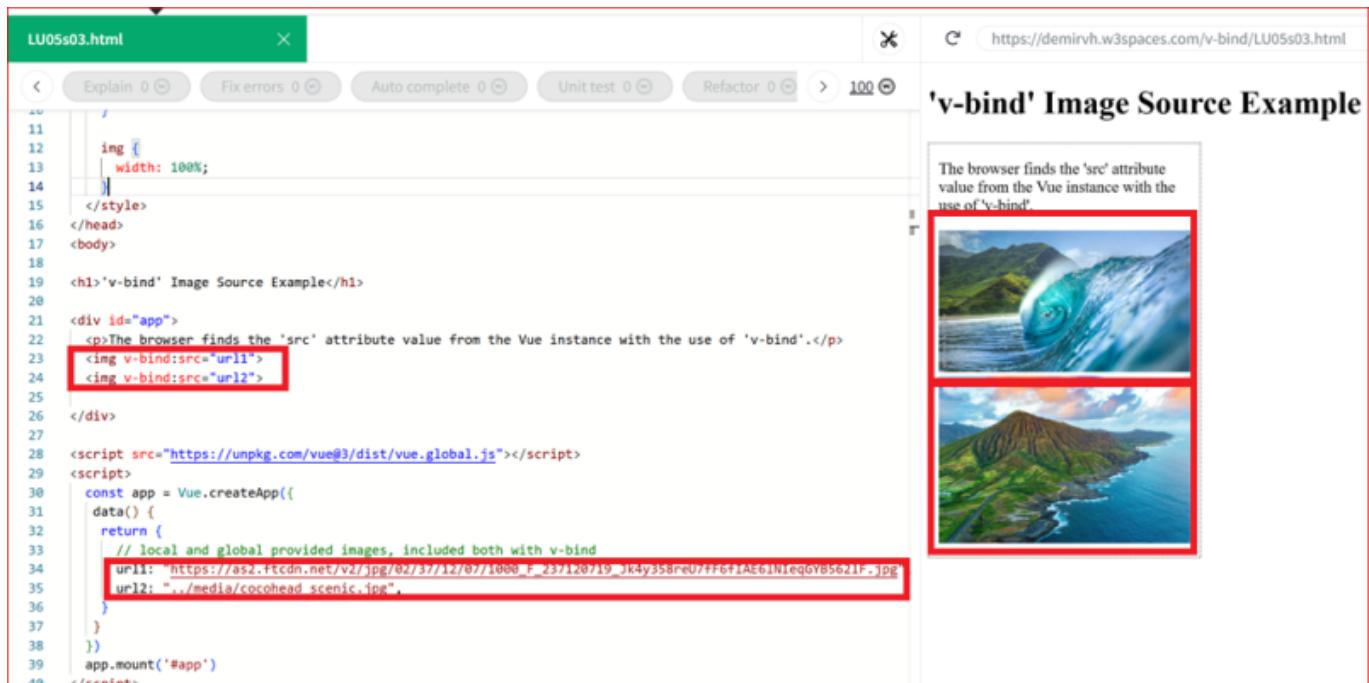

```

  LU05s03.html
  https://demirvh.w3spaces.com/v-bind/LU05s03.html

  Explain 0 Fix errors 0 Auto complete 0 Unit test 0 Refactor 0 100 %
  <head>
    <style>
      img {
        width: 100%;
      }
    </style>
  </head>
  <body>
    <h1>'v-bind' Image Source Example</h1>
    <div id="app">
      <p>The browser finds the 'src' attribute value from the Vue instance with the use of 'v-bind'.</p>
      
      
    </div>
    <script src="https://unpkg.com/vue@3/dist/vue.global.js"></script>
    <script>
      const app = Vue.createApp({
        data() {
          return {
            // local and global provided images, included both with v-bind
            url1: "https://as2.ftcdn.net/v2/jpg/02/37/12/07/1000_F_297120719_Jk4y358reU7FF6fIAE61N1eqGyB5621F.jpg",
            url2: "../media/cocohead_scenic.jpg",
          }
        },
        app.mount('#app')
      </script>

```

The browser finds the 'src' attribute value from the Vue instance with the use of 'v-bind'.





Volkan Demir

From:

<https://wiki.bzz.ch/> - BZZ - Modulwiki

Permanent link:

<https://wiki.bzz.ch/en/modul/m291/learningunits/lu05/loesungen/03?rev=1737717666>

Last update: 2025/01/24 12:21

