


# LU05.S03 - v-bind with src

## Hints

- Download the file and copy the content into the code area of the W3School on the left hand side of the coding window.
- You can execute the code by pressing the *run* button
- The result will be presented in the right hand side of the window.

## Assignment 1

- ZipFile with the HTML code-solution

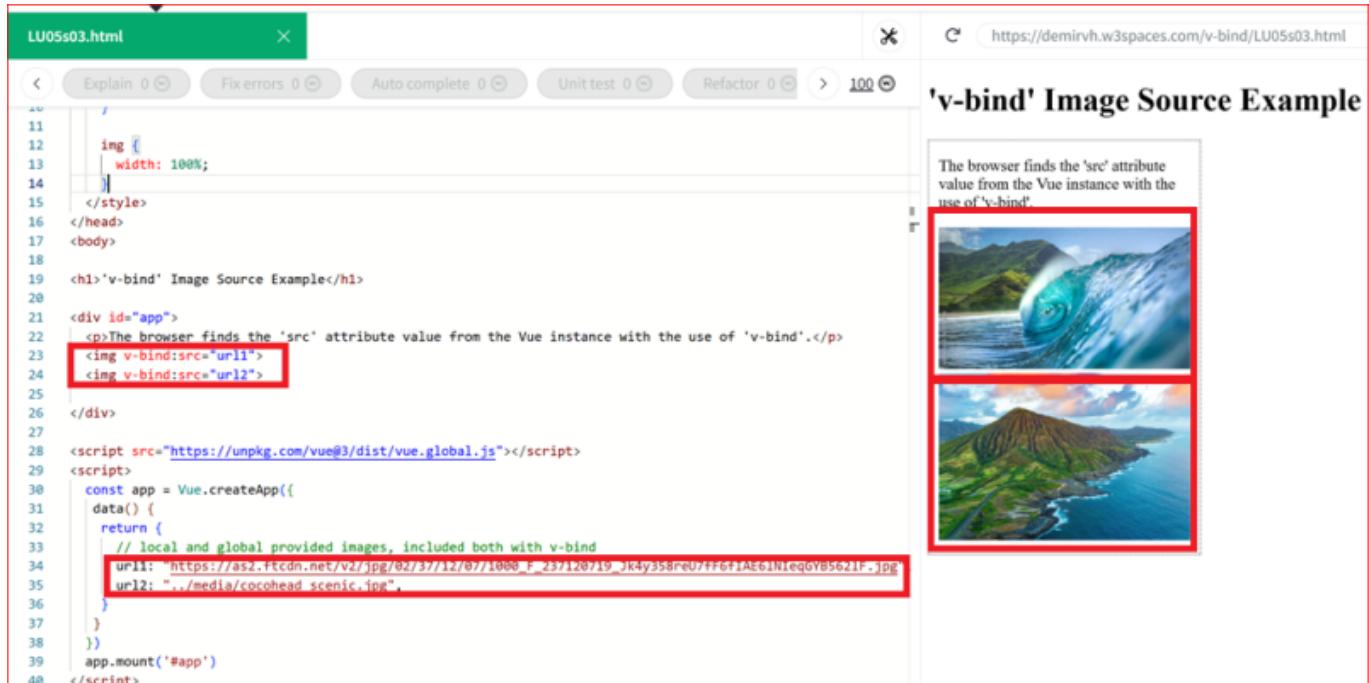

The screenshot shows a code editor with the title "LU05s03.html". The code is a Vue.js application with the following structure:

```

11  img {
12    width: 100%;
13  }
14  
```

**HTML:**

```

19 <h1>'v-bind' Image Source Example</h1>
20
21 <div id="app">
22   <p>The browser finds the 'src' attribute value from the Vue instance with the use of 'v-bind'.</p>
23   
24   
25
26 </div>
27
28 <script src="https://unpkg.com/vue@3/dist/vue.global.js"></script>
29 <script>
30   const app = Vue.createApp({
31     data() {
32       return {
33         // local and global provided images, included both with v-bind
34         url1: "https://as2.ftcdn.net/v2/jpg/02/37/12/07/1000_f_237120719_JK4y356reU/f76f1AE61Nleqq0e5o21f.jpg",
35         url2: "../media/cocohead_scenic.jpg",
36       }
37     }
38   })
39   app.mount('#app')
40 </script>

```

**Right Panel:**

'v-bind' Image Source Example

The browser finds the 'src' attribute value from the Vue instance with the use of 'v-bind'.




Volkan Demir

From:

<https://wiki.bzz.ch/> - BZZ - Modulwiki

Permanent link:

<https://wiki.bzz.ch/en/modul/m291/learningunits/lu05/loesungen/03?rev=1740645185>

Last update: 2025/02/27 09:33

