


LU05.S03 - v-bind with src

Zipfile with solutions

Hints

- Download the file and copy the content into the code area of the W3School on the left hand side of the coding window.
- You can execute the code by pressing the *run* button
- The result will be presented in the right hand side of the window.

Assignment 1

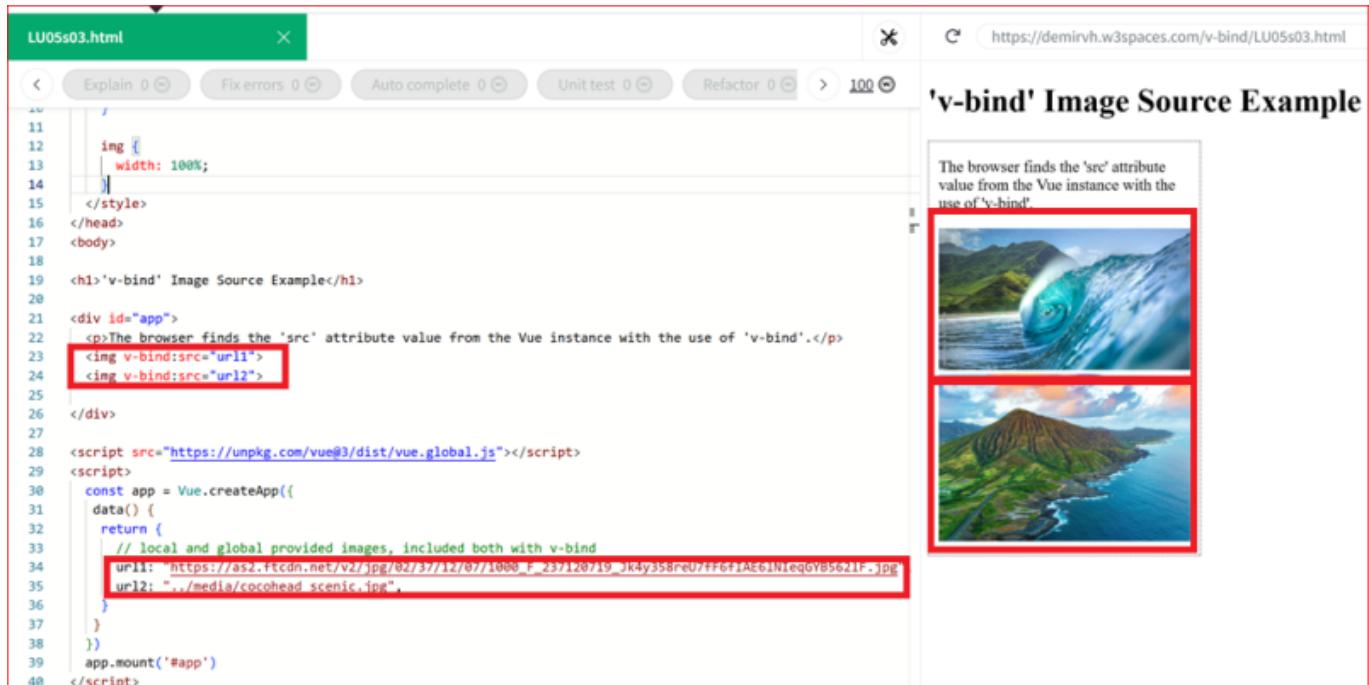

The screenshot shows a code editor with the title "LU05s03.html". The code demonstrates the use of `v-bind:src` to bind image sources. It includes a local image and two images from Unpkg. The output on the right shows the images side-by-side.

```

10
11     img {
12         width: 100%;
13     }
14
15 </style>
16 </head>
17 <body>
18
19 <h1>'v-bind' Image Source Example</h1>
20
21 <div id="app">
22     <p>The browser finds the 'src' attribute value from the Vue instance with the use of 'v-bind'.</p>
23     
24     
25
26 </div>
27
28 <script src="https://unpkg.com/vue@3/dist/vue.global.js"></script>
29 <script>
30     const app = Vue.createApp({
31         data() {
32             return {
33                 // local and global provided images, included both with v-bind
34                 url1: "https://as2.ftcdn.net/v2/jpg/02/37/12/07/1000_F_237120719_JK4yj58reUff6fIAk61Nleq6Y05621F.jpg",
35                 url2: "../media/cocohead_scenic.jpg",
36             }
37         }
38     })
39     app.mount('#app')
40 </script>

```



Volkan Demir

From:

<https://wiki.bzz.ch/> - BZZ - Modulwiki

Permanent link:

<https://wiki.bzz.ch/en/modul/m291/learningunits/lu05/loesungen/03?rev=1740664206>

Last update: 2025/02/27 14:50

