2025/11/11 11:27 1/2 LU05.S09 - v-else-if and v-else

## LU05.S08 - v-if with logical operators


## Sourcecode of the solution

Sourcecode of the solution

## **Assignment**

The first assignment checked by using v-if whether a certain variable was checked or not (true/false9Bei der ersten Aufgabe hat v-if binären Werte (true/false) geprüft. Now, we want to go one step further and check not only whether it is true or false, but moreover which value it contains. By this, we would be able to tell the customer of how many typewriters we have in stock, which may be of some benefit for the customer as well as for us.

- 1. Change the value of the variable *typewriter* to 0 und execute the script.
- 2. Note your realisations as a html-comment.
- 3. Change the content of the variable typeWriter to -1.
- 4. What happens, if the value typeWiter has no value at all respectively is empty?
- 5. Note your realisations as a html-comment.
- 6. Save your script accordingly, whether in your W3School workspace or on you local computer in your code-editor Webstorm.

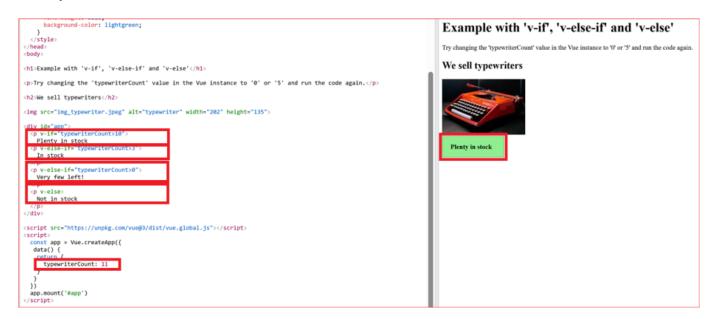

## **Vocabulary**

English	German




From:

https://wiki.bzz.ch/ - BZZ - Modulwiki

Permanent link:

https://wiki.bzz.ch/en/modul/m291/learningunits/lu05/loesungen/09?rev=1741086198





https://wiki.bzz.ch/ Printed on 2025/11/11 11:27