
## **Pod Lifecycle**

Lifecycle and hooks that are offered for Pods (and Containers) are points where your code can take actions. Kubernetes offers a number of places where you can provide explicit feedback to the system to have it operate as you'd like.

The lifecycle of a Pod is an aggregate of several components, as a Pod has a number of moving parts that can be in a variety of states as it operates. The representation of the lifecycle is how Kubernetes manages running your code for you, in conjunction with the control and feedback loops that work from the various controllers.

The states of a Pod's lifecycle are:

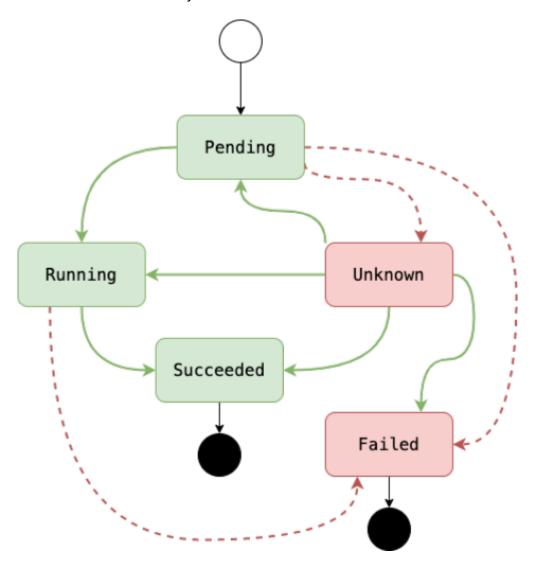

- **Pending**: The Pod has been created through the API, and is in the process of being scheduled, loaded, and run on one of the Nodes
- Running: The Pod is fully operational and the software is running within the cluster
- Succeeded (or) Failed: The Pod has finished operation (normally or crashed)
- **Unknown**: It occurs fairly rare, and it's typically seen when there's a problem internal to Kubernetes. In an example, K8s doesn't know the current state of containers, or is unable to communicate with its underlying systems to determine that state

## Last update: 2025/09/30 17:56

## **Probes**

The two probes enabled in Kubernetes are the **liveness probe** and **readiness Probe**. They are complimentary, but different in intent and usage, and can be defined for each container within a Pod. In both cases, they provide a means for your code to influence how Kubernetes manages the containers.

The most basic probe is the **Liveness probe**. It provides a command or URL that Kubernetes can use to determine whether a Pod is still operational. If the call succeeds, Kubernetes will assume the container is healthy. If it fails to respond, then the Pod can be handled as the restartPolicy is defined. The result is binary: either the probe succeeds, and Kubernetes believes your Pod is running, or it fails, so Kubernetes believes your Pod is no longer functional.

In the latter case, it will check with the defined RestartPolicy to choose what to do.

The default value for restartPolicy is Always, meaning if a container within the Pod fails, Kubernetes will always attempt...

Based on "Kubernetes for Developers by Joseph Heck"



From:

https://wiki.bzz.ch/ - BZZ - Modulwiki

Permanent link:

https://wiki.bzz.ch/en/modul/m321\_aws/topics/09?rev=1759247772

Last update: 2025/09/30 17:56



https://wiki.bzz.ch/ Printed on 2025/11/27 20:21