


# LU04.A02 - SQL-DQL: Select from multiple tables

## Requirements

- Work type: individual
- Timeframe: 20 Minutes
- Means of aid:
  - only teaching materials, no websearch, no use of ai.
  - [W3Schools | SQL Editor](#)
- Expected result: Semantically and syntactically correct SQL statements according to the requirements of the case studies.

## Case studies / Assignments

The following ERD describes a order database for a a shop.

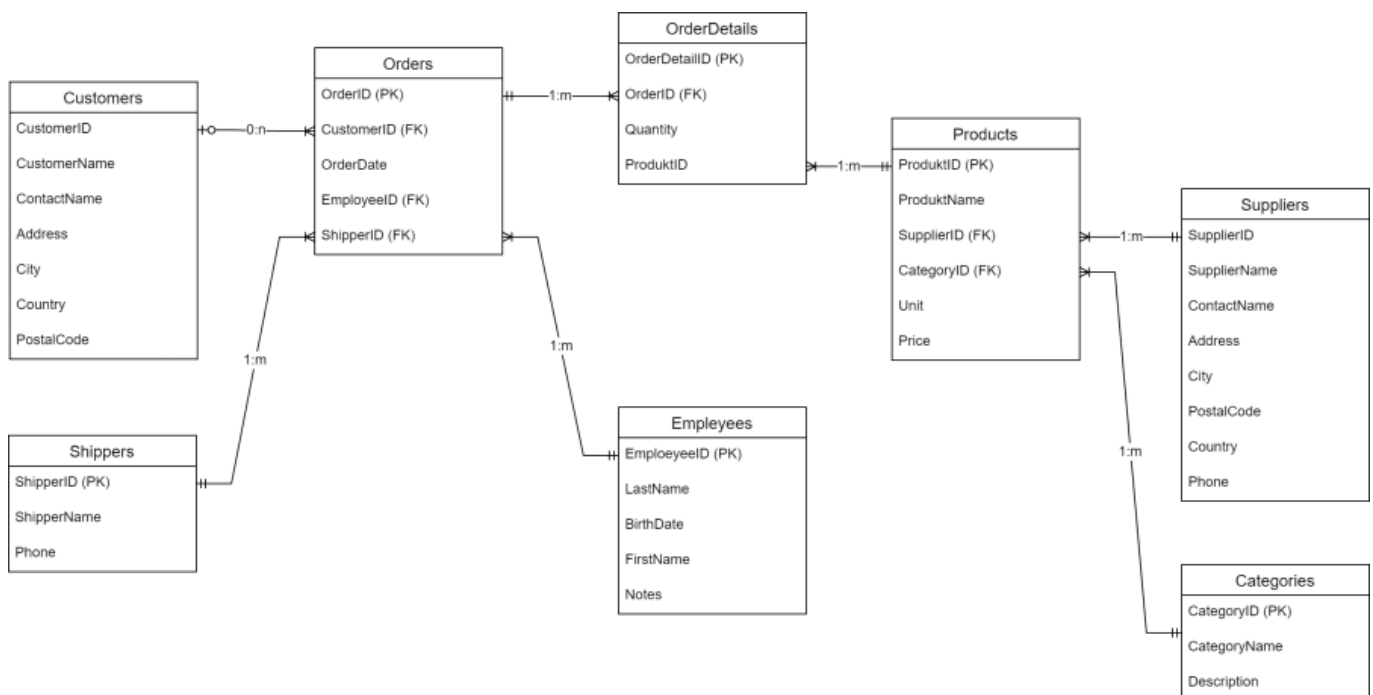

## Assignments

Your general assignment is to develop DQL commands that match the requirements below:

- a) We need a list with product details as following:
  - Supplier name
  - Supplier phone
  - ProductID

- ProductName
- Units
- Price
- Ordered by SupplierName descending

```
SELECT s.SupplierName, s.Phone, p.ProductID, p.ProductName, p.Units,
p.Price,
FROM Suppliers s, Product p
WHERE s.SupplierID = p.SupplierID;
```

- \* b) Generate a list with ProductNames, Price and SupplierIDs within a price range of 20 and 45, sorted the Price and SupplierID, both ascending.
- \* c) Find all employees who graduated from a university. The relevant information is hidden in the table Employees, within the columns Notes.

## Solution

[Lösung](#)

## Vocabulary

English	German
respectively	beziehungsweise
assignment	Auftrag



Volkan Demir

From:  
<https://wiki.bzz.ch/> - **BZZ - Modulwiki**

Permanent link:  
<https://wiki.bzz.ch/modul/m290/learningunits/lu04/aufgaben/a02?rev=1725362594>

Last update: **2024/09/03 13:23**

