


LU04.A02 - SQL-DQL: Select from multiple tables

Requirements

- Work type: individual
- Timeframe: 20 Minutes
- Means of aid:
 - only teaching materials, no websearch, no use of ai.
 - [W3Schools | SQL Editor](#)
- Expected result: Semantically and syntactically correct SQL statements according to the requirements of the case studies.

Case studies / Assignments

The following ERD describes a order database for a a shop.

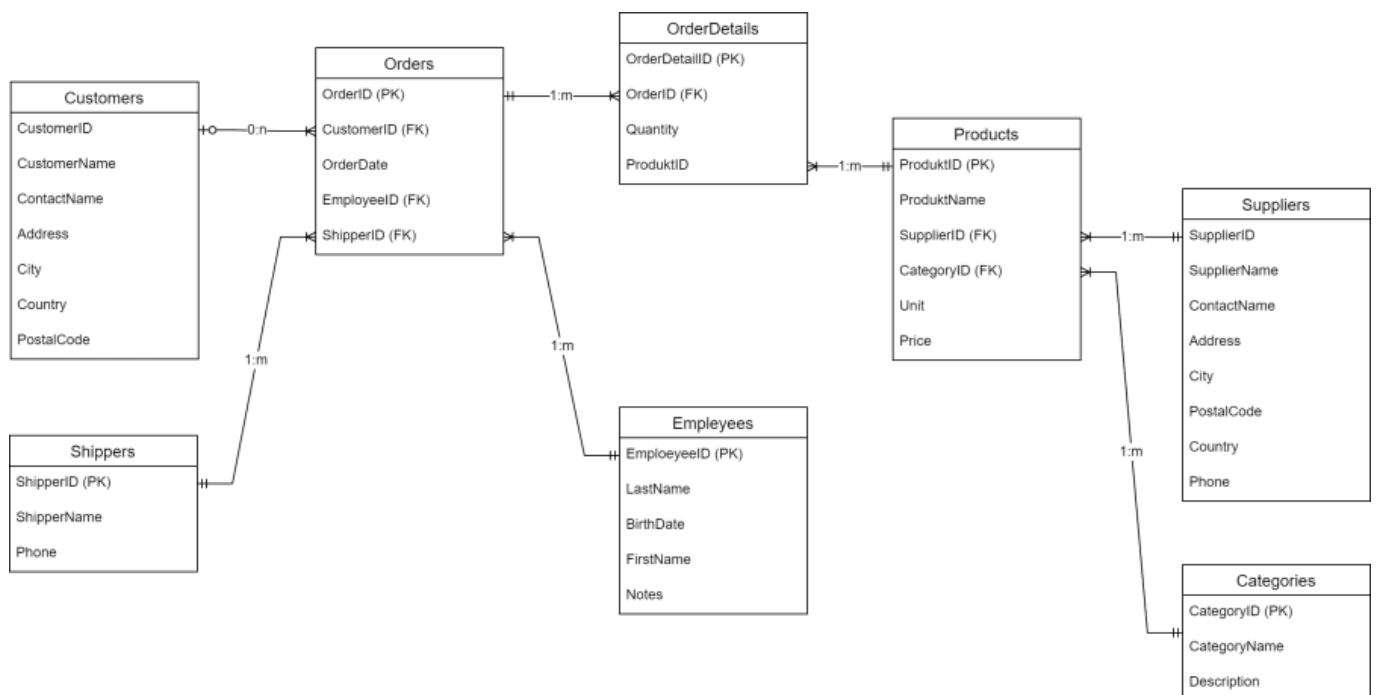

Assignments

Your general assignment is to develop DQL commands that matches the requirements below:

- a) We need a list with product details as following:
 - Supplier name
 - Supplier phone
 - ProductID

- ProductName
- Units
- Price
- Ordered by SupplierName descending

```
SELECT s.SupplierName, s.SupplierID, s.phone, p.ProductID, p.ProductName,
p.Unit, p.Price
FROM Suppliers s, Products p
WHERE p.SupplierID = s.SupplierID
ORDER BY s.SupplierName DESC;
```

===== LU04.A01 - SQL-DQL: Select from one table =====

- * b) Generate a list with ProductNames, Price and SupplierIDs within a price range of 20 and 45, sorted the Price and SupplierID, both ascending.
- * c) Find all employees who graduated from a university. The relevant information is hidden in the table Employees, within the columns Notes.

Solution

[Lösung](#)

Vocabulary

English	German
respectively	beziehungsweise
assignment	Auftrag



Volkan Demir

From:

<https://wiki.bzz.ch/> - **BZZ - Modulwiki**

Permanent link:

<https://wiki.bzz.ch/modul/m290/learningunits/lu04/aufgaben/a02?rev=1725363282>

Last update: **2024/09/03 13:34**

