


# LU04c - SQL-DQL: Select from multiple tables

Source: [W3Schools.co: SELECT with WHERE](https://www.w3schools.com/sql/sql_select_where.asp)

As we know, a RDB essentially consists of tables which are linked together to increase quality and performance and reduce unintended redundancies and inconsistencies. The following ERD shows such a data structure of a shop including some details.

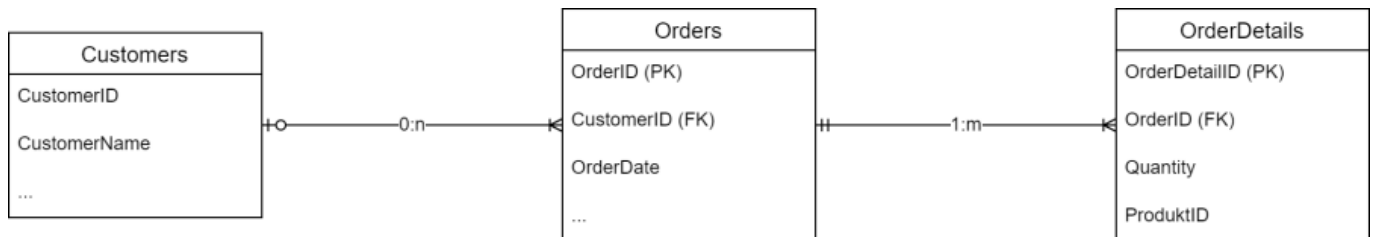

If we want to know which orders were placed by which customer we have to deal with the two tables **CUSTOMERS** and **ORDERS**, and the key that connects the two is logically the CustomerID.

## Select on two tables

In practice, we would like to know which customer, e.g. with ID =3, has ordered which product. The following SQL statement would read as follows:

```

SELECT c.*, o.orderdate
FROM CUSTOMERS c, ORDERS o
WHERE c.CustomerID = 3
AND c.CustomerID = o.CustomerID;
    
```

In the line **FROM CUSTOMER c, ORDERS o**, we use an alias for the tablename. This is practical because we can use the alias instead of the full table name in the rest of the statement. The result of the SQL statement you find below

```

SELECT c.*, o.orderdate
FROM CUSTOMERS c, ORDERS o
WHERE c.CustomerID = 3
AND c.CustomerID = o.CustomerID;
    
```

Edit the SQL Statement, and click "Run SQL" to see the result.

Run SQL »

Result:

Number of Records: 1

| CustomerID | CustomerName            | ContactName    | Address        | City        | PostalCode | Country | orderdate  |
|------------|-------------------------|----------------|----------------|-------------|------------|---------|------------|
| 3          | Antonio Moreno Taquería | Antonio Moreno | Mataderos 2312 | México D.F. | 05023      | Mexico  | 11/27/1996 |

## Select on three or more tables

The basic idea how to receive data from two table shows us the way how we can retrieve data from three or more tables, as the approach is similar. In that case the three or more tables require a common ID, that links the tables involved. The requirements could contain some order details, e.g. which product and the which quantity the customers had ordered. The according SQL select statement would be like:

```
SELECT c.CustomerID, c.CustomerName, o.Orderdate, od.ProductID, od.Quantity
FROM Customers c, Orders o, OrderDetails od
WHERE o.orderid = od.orderID
AND c.CustomerID = o.CustomerID
AND c.CustomerID = 2;
```

The result is shown in the figure below:

```
SELECT c.CustomerID, c.CustomerName, o.Orderdate, od.ProductID, od.Quantity
FROM Customers c, Orders o, OrderDetails od
WHERE o.orderid = od.orderID
AND c.CustomerID = o.CustomerID
AND c.CustomerID = 2
;
```

Edit the SQL Statement, and click "Run SQL" to see the result.

Run SQL »

Result:

Number of Records: 2

| CustomerID | CustomerName                       | Orderdate | ProductID | Quantity |
|------------|------------------------------------|-----------|-----------|----------|
| 2          | Ana Trujillo Emparedados y helados | 9/18/1996 | 69        | 1        |
| 2          | Ana Trujillo Emparedados y helados | 9/18/1996 | 70        | 5        |

## Vocabulary

| English     | German                            |
|-------------|-----------------------------------|
| essentially | im Grunde genommen, hauptsächlich |
| requirement | Anforderung                       |



Volkan Demir

From:

<https://wiki.bzz.ch/> - **BZZ - Modulwiki**

Permanent link:

[https://wiki.bzz.ch/modul/m290/learningunits/lu04/theorie/c\\_multipletables?rev=1725449915](https://wiki.bzz.ch/modul/m290/learningunits/lu04/theorie/c_multipletables?rev=1725449915)

Last update: **2024/09/04 13:38**

