

# LU09.A02 - SQL- DCL: CREATE USER

It is high time to mess a little around with our new SQL powers, don't you think? So, let's try it directly on our Webstorm.

As the database administrator, we want to create a new user and only grant this user the necessary rights to operate the web application, which includes DML operations such as INSERT, UPDATE, DELETE, but not DDL operations such as CREATE or DROP of tables. After all, we don't want the web application to take control over our database, are we?

## Requirements

- Work type: individual
- Timeframe: 10 Minutes
- Means of aid:
  - only teaching materials, no websearch, no use of ai.
  - Webstorm with connection to the MySQL-DB
- Expected result: Semantically and syntactically correct SQL statements according to the requirements of the case studies.

## Case studies / Assignments

As a database administrator we are assigned to create a `AppUser`, which has for security reasons only the right for DML operations, but must not be allowed for DDL operation. We don't want a hacker to delete our entire webshop, do we?

To get the job done, follow the instructions below:

1. Create as the `sysdba` (systemadministrator of the database) a new user
2. Grant this role only the necessary rights
3. Create as a `sysdba` a test table and fill it with some testdata
4. Establish a new connection within the webstorm by using the credentials of this new user
5. Try out the DML operations, which should be possible (insert, update, delete)
6. Try out DDL operations, which should result in errors due to missing permissions for that particular user
7. Drop the newly created user finally

### Task A1

**Create the User:** Create a user named `restrictedUser` with the password `SafePassword123` using the `mysql_native_password` plugin.


```
CREATE USER 'restrictedUser'@'localhost' IDENTIFIED WITH  
mysql_native_password BY 'SafePassword123';
```

## Task A2

**Overview of the current privileges:** Display all users.

```
SELECT user, host, plugin FROM mysql.user;
```

The result set should look like:

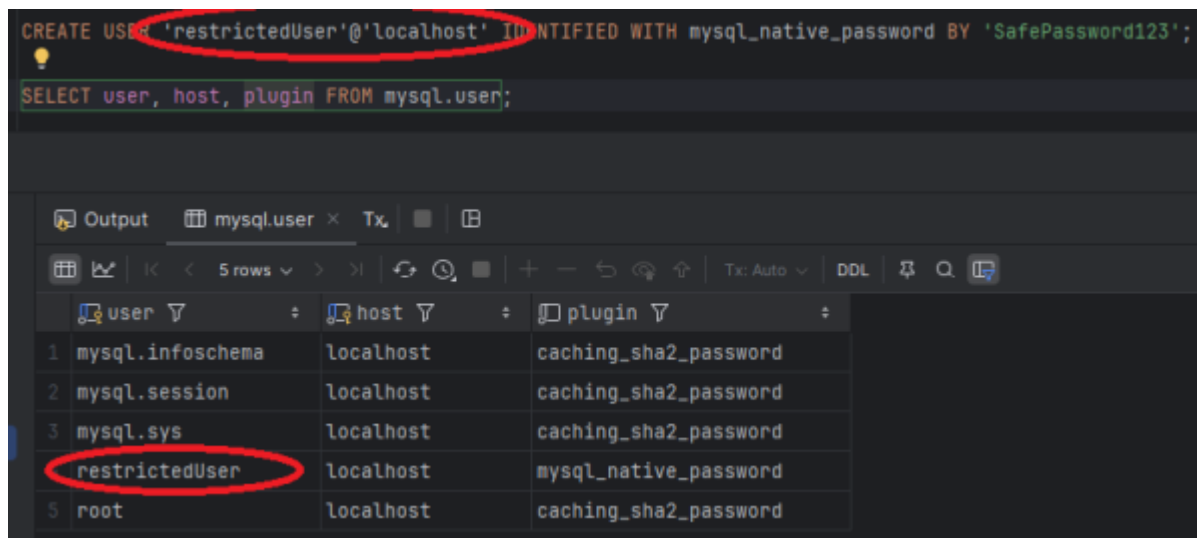

The screenshot shows a MySQL command-line interface. At the top, two SQL commands are entered: `CREATE USER 'restrictedUser'@'localhost' IDENTIFIED WITH mysql_native_password BY 'SafePassword123';` and `SELECT user, host, plugin FROM mysql.user;`. The first command is highlighted with a red circle. Below the commands, the results of the `SELECT` query are displayed in a table. The table has three columns: `user`, `host`, and `plugin`. The results are as follows:

user	host	plugin
mysql.infoschema	localhost	caching_sha2_password
mysql.session	localhost	caching_sha2_password
mysql.sys	localhost	caching_sha2_password
restrictedUser	localhost	mysql_native_password
root	localhost	caching_sha2_password

The `restrictedUser` entry is highlighted with a red circle.

## Task A3

**Grant Privileges Without Table Management:** Grant the user *restrictedUser* the ability to read and write data but not to create, alter, or drop tables. Use the following commands to give only the required privileges.

```
GRANT SELECT, INSERT, UPDATE, DELETE ON myDatabase.* TO  
'restrictedUser'@'localhost';
```

## Task A4

**Revoke Privileges:** To be certain that nothing unintended can happen revoke the CREATE, ALTER, and DROP privileges explicitly.


```
REVOKE CREATE, ALTER, DROP ON myDatabase.* FROM  
'restrictedUser'@'localhost';
```

## Task A5

**View the User's Privileges:** Check the privileges to ensure that the user cannot manage tables.

```
SHOW GRANTS FOR 'restrictedUser'@'localhost';
```

```
GRANT SELECT, INSERT, UPDATE, DELETE ON myDatabase.* TO 'restrictedUser'@'localhost';
REVOKE CREATE, ALTER, DROP ON myDatabase.* FROM 'restrictedUser'@'localhost';
SHOW GRANTS FOR 'restrictedUser'@'localhost';
```

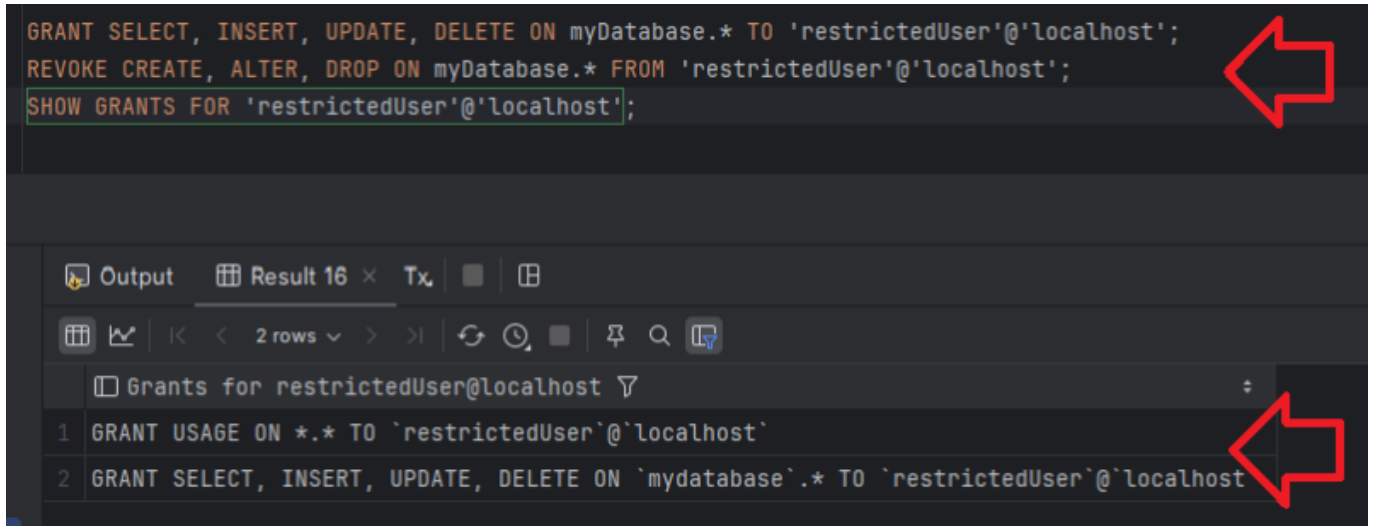

```
1 GRANT USAGE ON *.* TO `restrictedUser`@`localhost`
2 GRANT SELECT, INSERT, UPDATE, DELETE ON `mydatabase`.* TO `restrictedUser`@`localhost`
```

## Task A6

**Test the User's Access:** Connect as *restrictedUser* and try to perform a CREATE TABLE or DROP TABLE operation. The attempt should result in a permission error.

## Task A7

**Delete the User (optional):** After testing, you can delete the user if they are no longer needed.

## Solution

[Lösung](#)

## Vocabulary

English	German
explicitely	ausdrücklich
assignment	Auftrag
to revoke	widerrufen, aufheben



Volkan Demir

Last  
update: 2024/10/29 12:20 modül:m290:learningunits:lu06:aufgaben:a02 <https://wiki.bzz.ch/modul/m290/learningunits/lu06/aufgaben/a02?rev=1730200854>

---

From:  
<https://wiki.bzz.ch/> - **BZZ - Modulwiki**

Permanent link:  
<https://wiki.bzz.ch/modul/m290/learningunits/lu06/aufgaben/a02?rev=1730200854>

Last update: **2024/10/29 12:20**

