

LU09.A02 - SQL- DCL: CREATE USER

It is high time to mess a little around with our new SQL powers, don't you think? So, let's try it directly on our Webstorm.

As the database administrator, we want to create a new user and only grant this user the necessary rights to operate the web application, which includes DML operations such as INSERT, UPDATE, DELETE, but not DDL operations such as CREATE or DROP of tables. After all, we don't want the web application to take control over our database, are we?

Requirements

- Work type: individual
- Timeframe: 10 Minutes
- Means of aid:
 - only teaching materials, no websearch, no use of ai.
 - Webstorm with connection to the MySQL-DB
- Expected result: Semantically and syntactically correct SQL statements according to the requirements of the case studies.

Case studies / Assignments

As a database administrator we are assigned to create a `AppUser`, which has for security reasons only the right for DML operations, but must not be allowed for DDL operation. We don't want a hacker to delete our entire webshop, do we?

To get the job done, follow the instructions below:

1. Create as the `sysdba` (systemadministrator of the database) a new user
2. Grant this role only the necessary rights
3. Create as a `sysdba` a test table and fill it with some testdata
4. Establish a new connection within the webstorm by using the credentials of this new user
5. Try out the DML operations, which should be possible (insert, update, delete)
6. Try out to DDL operations, which should result in errors due to missing permissions for that particular user
7. Drop the newly created user finally

Task A1

Create the User: Create a user named `restrictedUser` with the password `SafePassword123` using the `mysql_native_password` plugin.


```
CREATE USER 'restrictedUser'@'localhost' IDENTIFIED WITH
mysql_native_password BY 'SafePassword123';
```

Task A2

Overview of the current privileges: Display all users.

```
SELECT user, host, plugin FROM mysql.user;
```

The result set should look like:

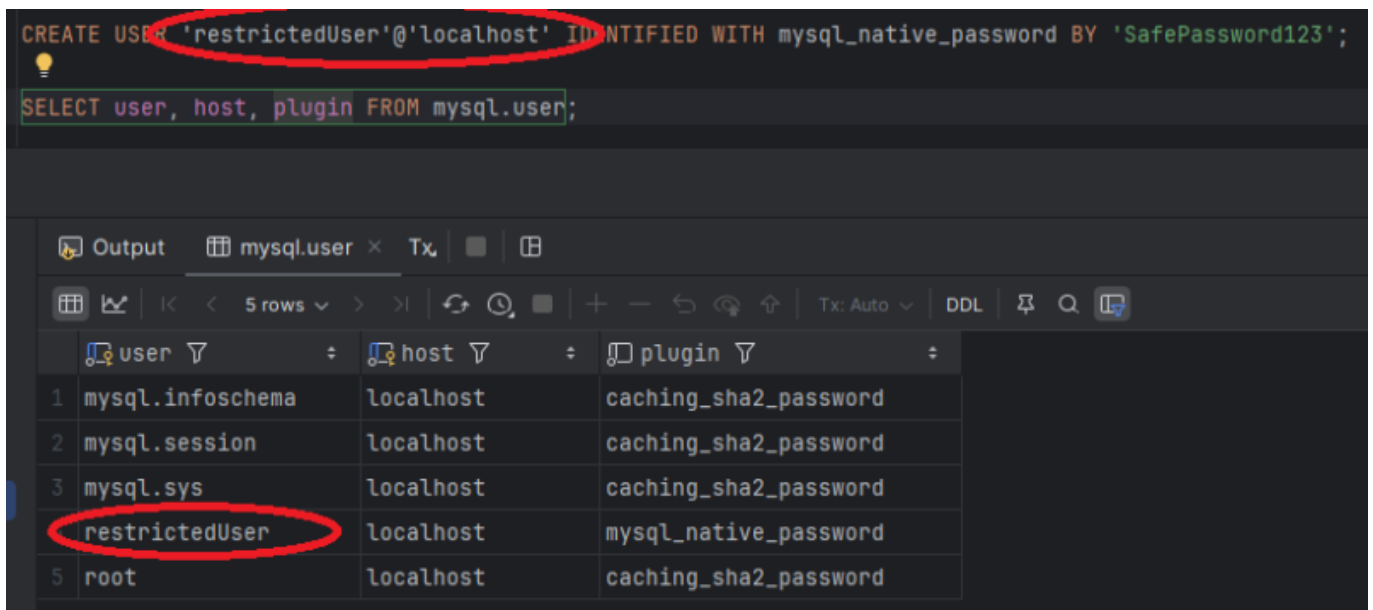

```
CREATE USER 'restrictedUser'@'localhost' IDENTIFIED WITH mysql_native_password BY 'SafePassword123';
SELECT user, host, plugin FROM mysql.user;
```

	user	host	plugin
1	mysql.infoschema	localhost	caching_sha2_password
2	mysql.session	localhost	caching_sha2_password
3	mysql.sys	localhost	caching_sha2_password
4	restrictedUser	localhost	mysql_native_password
5	root	localhost	caching_sha2_password

Task A3

Grant Privileges Without Table Management: Grant the user *restrictedUser* the ability to read and write data but not to create, alter, or drop tables. Use the following commands to give only the required privileges.

```
GRANT SELECT, INSERT, UPDATE, DELETE ON myDatabase.* TO
'restrictedUser'@'localhost';
```

Task A4

Revoke Privileges: To be certain that nothing unintended can happen revoke the CREATE, ALTER, and DROP privileges explicitly.


```
REVOKE CREATE, ALTER, DROP ON myDatabase.* FROM
'restrictedUser'@'localhost';
```

Task A5

View the User's Privileges: Check the privileges to ensure that the user cannot manage tables.

```
SHOW GRANTS FOR 'restrictedUser'@'localhost';
```

```
GRANT SELECT, INSERT, UPDATE, DELETE ON myDatabase.* TO 'restrictedUser'@'localhost';
REVOKE CREATE, ALTER, DROP ON myDatabase.* FROM 'restrictedUser'@'localhost';
SHOW GRANTS FOR 'restrictedUser'@'localhost';
```

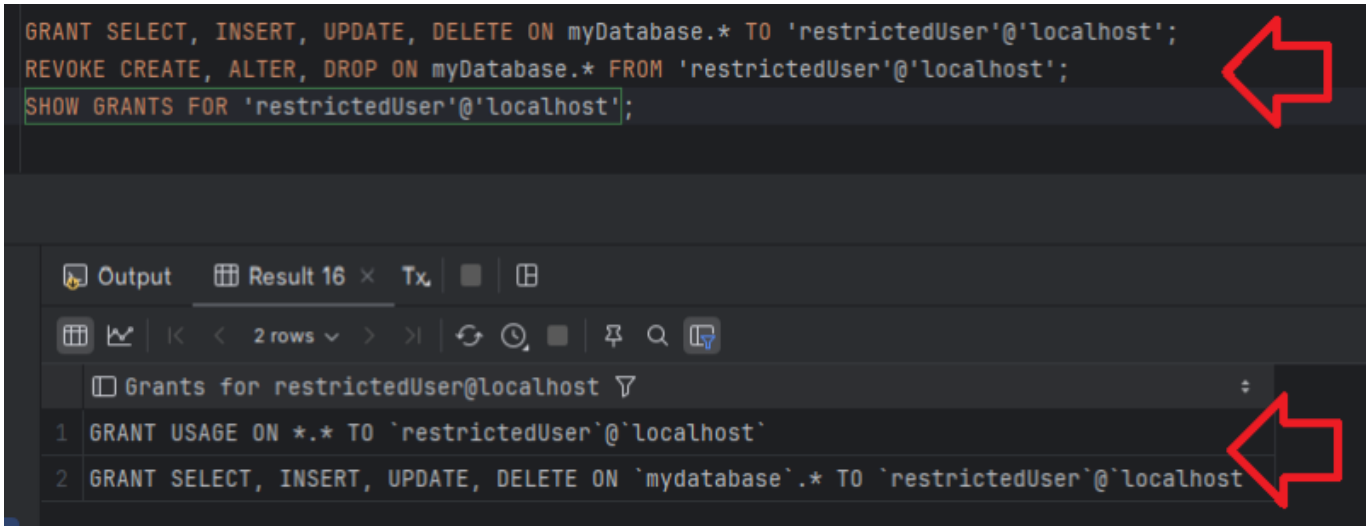

The screenshot shows a SQL IDE interface. The top part displays the SQL commands entered: `GRANT SELECT, INSERT, UPDATE, DELETE ON myDatabase.* TO 'restrictedUser'@'localhost';`, `REVOKE CREATE, ALTER, DROP ON myDatabase.* FROM 'restrictedUser'@'localhost';`, and `SHOW GRANTS FOR 'restrictedUser'@'localhost';`. A red arrow points to the first command. Below the commands, the output window shows the results of the `SHOW GRANTS` command. The output is titled "Grants for restrictedUser@localhost" and contains two rows: `1 GRANT USAGE ON *.* TO 'restrictedUser'@'localhost'` and `2 GRANT SELECT, INSERT, UPDATE, DELETE ON `mydatabase`.* TO 'restrictedUser'@'localhost'`. A red arrow points to the second row of the output.

Task A6

Test the User's Access: Establish a new console connection to the database by using *restrictedUser* + *password* and try to perform a CREATE TABLE or DROP TABLE operation. The attempt should result in a permission error als displayed in the image below.

Task A7

Delete the User (optional): After testing, you can delete the user if they are no longer needed.

Solution

[Lösung](#)

Vocabulary

English	German
explicitely	ausdrücklich
assignment	Auftrag
to revoke	widerrufen, aufheben



Volkan Demir

Last update: 2024/10/29 12:23 modul:m290:learningunits:lu06:aufgaben:a02 <https://wiki.bzz.ch/modul/m290/learningunits/lu06/aufgaben/a02?rev=1730200990>

From:
<https://wiki.bzz.ch/> - **BZZ - Modulwiki**

Permanent link:
<https://wiki.bzz.ch/modul/m290/learningunits/lu06/aufgaben/a02?rev=1730200990>

Last update: **2024/10/29 12:23**

